



FRONT BUMPER

(NISSAN PATROL Y62)

INSTALLATION MANUAL

Model: Nissan Y62

Product number: TRPT-NS-Y62-008

Product name: TRE4X4 Front bumper

Product material: aluminum-magnesium alloy

Construction personnel: 2

construction hours: 3 hours

Installation Difficulty Rating: Medium difficult

Remarks: There are two square hollow holes under the front bumper as support points for farm jack poles

Introduction:

1. The color is black and pockmarked, and the color is well-proportioned
2. Auxiliary lights can be installed
3. It can be towed and towed, with the original car trailer hook
4. Increase the approach angle.
5. Easy and fast installation
6. The original car hole installation
7. Strengthen the body protection strength
8. A winch can be installed and modified
9. There is a front lower guard plate
10. It can be painted and changed on the surface of the product (according to the color of the body, the same color of the body/can be partially changed by graffiti)

Remarks: The bar body itself needs to have a certain amount of clearance with the body parts (adjust the appropriate clearance according to the vehicle itself)

The original car bar skin does not need to be cut, which will not affect the restoration of the original car

tool:

Socket: 10, 16, 18

Wrench: 10, 15


Hex wrench: 4, 6

Other: medium quick wrench, large quick wrench, kg wrench

Installation steps (text + picture):

Step 1: Install the front bumper winch tray, a total of 8 original car screws

Tools: 16 socket, large quick wrench, kg wrench

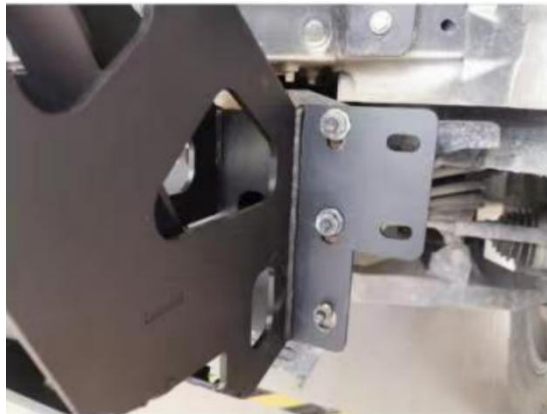

Step 2: Install the grid fixing bracket, fix the grid with 3 screws on the left and right, and 4 screws on the triangle bracket in the middle to fix the grid

Tools: 10 socket, medium quick wrench



Step 3: Install the corner reinforcement bracket and fix the winch tray, fix the bar skin and the corner with 2 screws on the left and right, install the fog lamp, radar probe and wiring harness

Tools: 15 wrench, 16 socket, large quick wrench



Step 4: Install the front bumper skin, fix it with 4 screws on the front, fix it with 2 screws at the guide port of the winch, and fix it with 1 screw on the left and right sides and the corner reinforcement bracket

Tools: T6 Allen wrench, 16 wrench



Step 5: Install the lower guard plate in Figure 1, a total of 5 screws Figure 2 Install the wheel eyebrow lining bracket, fix the bracket and the bar skin, cut the inner lining according to the fixing hole on the other side of the bracket

Tools: T4, T6 Allen wrench, 10 wrench, 18 socket, large quick wrench



TRE4X4 Nissan Y62 front bumper has been installed





WWW.TRE4X4.COM